

HI LED

HI LED 20W/850/ED23.5/E26



Characteristic:
 Universal burning position;
 High efficacy/Low operating cost ;
 Superior life hours.

Application:
 Street lighting,Outdoor lighting

Product Data

Physical Data/ Requirements


Performance Data

Base Designation	E26	Input Power (W)	20
Bulb Designation	ED23.5	Input Voltage	120-277Vac
Bulb Diameter mm	76 max	Light Output (Lumens100Hrs)	3600
Max Overall Length (MOL) mm	196 max	Lamp Lumens Per Watt	180
Light Center Length (LCL) mm /		Rated Life (Hrs. 10 Hr.1Start)	25000
Luminaire Type	ENCLOSE	Color Temperature (k)	5000
Burning Position	Universal	Chromaticity (CIE-x/y)	0.347, 0.355
Protection class IEC	Safety class II	Color Rendering Index (CRI)	80
Certifications	ETL、FCC	Socket Style	Mogul


Application Conditions

Ambient temperature range -20°C to +45°C

Spectrum

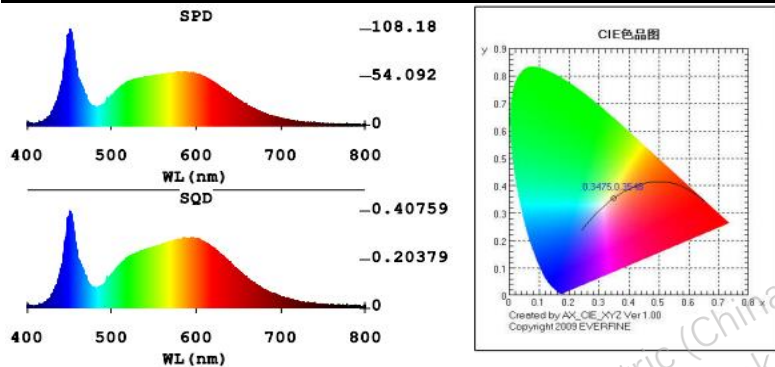

Lamp Drawing

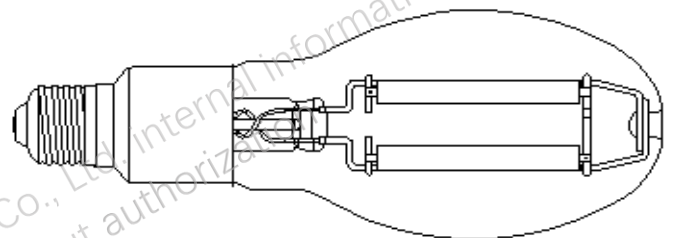

Plusrite does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Plusrite. Plusrite is registered.

www.plusrite.com