



POSEIDON V SPECIFICATION

ALS05/150/SW/8XX/YY

Our products have high efficiency, uniform and consistent color, a longer design, a variety of installation methods to meet the needs of different places, beautiful at the same time, with a special lens design that can reduce light to the back side.

Product data

General Information

Light source replaceable	No
Number of gear units	1
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optic type	Symmetrical
Optical cover/lens type	Lens
Luminaire light beam spread	Type II /Type III/Type IV/Type V
Sensor socket	Z10/ZHAGA
Cable length	Cable 0.3 m without plug
Protection class IEC	Safety class I
Certifications	cETLus/FCC/DLC5.1 Premium
Lifetime (hour)	50,000h
EU RoHS compliant	Yes

Light source engine type	LED
--------------------------	-----

Operating and Electrical

Input voltage	120-277V/277-480V/12V
Input frequency	50 or 60Hz
Current	1.5A
THD	<20%
Power factor (min)	0.95

Mechanical and Housing

Housing material	Aluminum die cut
Reflector material	-
Optical cover/lens material	Polycarbonate
Optical cover/lens finish	Clear
Product dimensions mm	370.6*362.6*78
Product dimensions (inch)	14.59*14.29*3.07
Product color	Bronze/Black/White

Approval and Application

Ingress protection code	IP66
Mech.impact protection code	IK08

Initial Performance (IEC Compliant)

Light output	13500lm-90w/18000lm-120w/22500lm-150w
Luminous flux tolerance	+/-10%
Efficacy	140lm/w/150lm/w
Init.Corr.Color Temperature	3000K/4000K/5000K
Init.Color Rendering Index	>80
Initial input power	90W/120W/150W
Power consumption tolerance	+/-10%

Application Conditions

Ambient temperature range	-40 to +50°C
Dimming	0-10V

Logistical Data

Order product name	ALS05/150/SW/8XX/YY
Net weight (piece)	-
Gross weight (piece)	-
Packaging dimensions (mm)	-
Packaging dimensions (inch)	-
Packaging unit (piece)	-

Volumen (m ³)	-
Volumen (ft ³)	-

Application


Landscape Lighting

Pathway Lighting


Perimeter Lighting

Entryway Lighting

Light Distribution & Spectrum

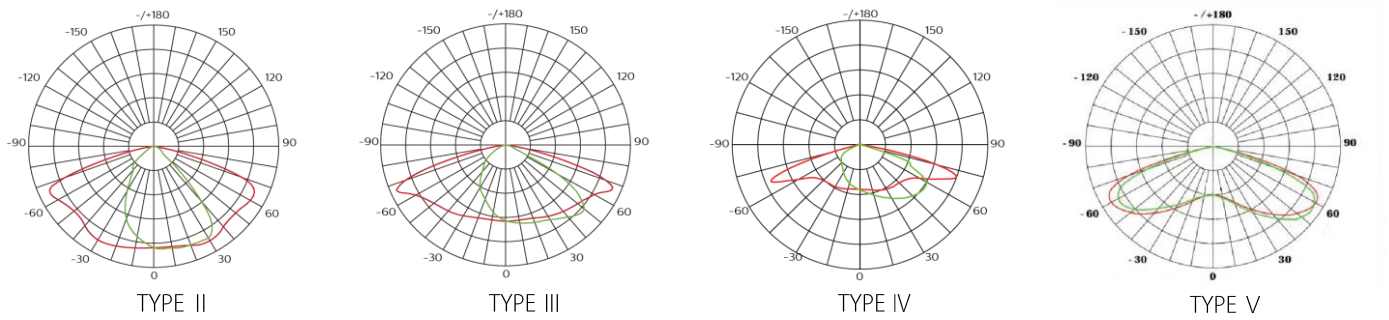






Dimensional drawing



POSEIDON V/S

Accessories

Material	Description
 Yoke Mount	Adjustable angle mounting bracket
 Wall Mount	Wall bracket helps to hold the lighting fixture attached to the wall
 SB	Mounting bracket for a single lighting fixture
 Extruded Arm	Adjustable universal pole mount is for tube/pipe pole installation of the lighting fixture
 SF	Slip fitter is for round light pole tenon mounting bracket for a single lighting fixture

Plusrite does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Plusrite. Plusrite is registered.