

HI LED

HI LED 55W/850/ED37/EX39

Characteristic:

Universal burning position;
High efficacy/Low operating cost ;
Superior life hours.

Application:

Street lighting,Outdoor lighting



Product Data

Physical Data/ Requirements

Performance Data



Base Designation	EX39	Input Power (W)	55
Bulb Designation	ED37	Input Voltage	120-277Vac
Bulb Diameter mm	121 max	Light Output (Lumens100Hrs)	10000
Max Overall Length (MOL) mm	290 max	Lamp Lumens Per Watt	182
Light Center Length (LCL) mm /		Rated Life (Hrs. 10 Hr.1Start)	25000
Luminaire Type	ENCLOSE	Color Temperature (k)	5000
Burning Position	Universal	Chromaticity (CIE-x/y)	0.347, 0.349
Protection class IEC	Safety class II	Color Rendering Index (CRI)	80
Certifications	ETL	Socket Style	Mogul

Application Conditions

Ambient temperature range -20°C to +45°C

Spectrum

Lamp Drawing

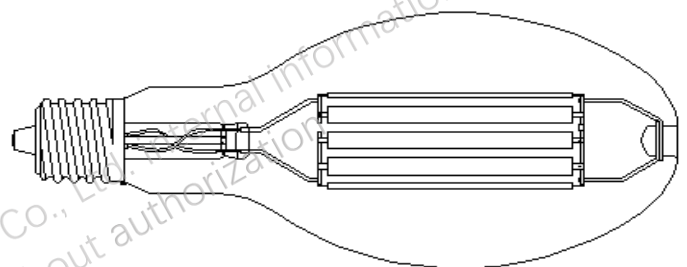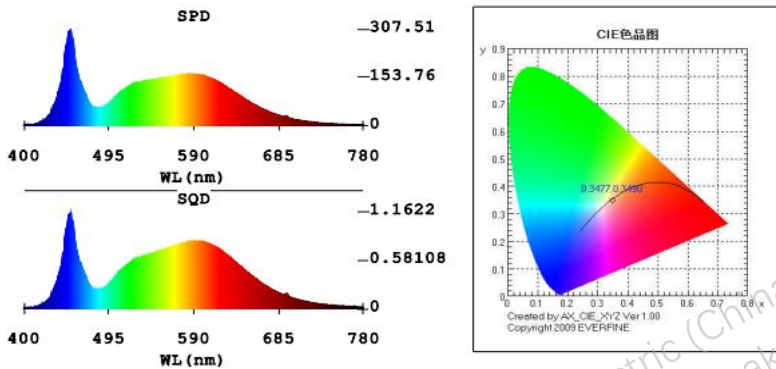

Plusrite does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Plusrite. Plusrite is registered.